

Registration No. A260-E24

**Panasonic Industrial China**

**SPECIFICATIONS  
FOR Blu-ray DISC DRIVE**

**DATE OF ISSUE : Oct. 19. 2011**

**MODEL : UJ260ABPU-B**

**Rev . 1.0**

<b>RECEIVED</b>
DATE :
Do not disclose this document to any third party. This document, whether wholly or partially, may not be reprinted or reproduced

Comment :

---



---



---



---

Optical Devices Business Unit  
Panasonic System Networks CO.,LTD  
  
1080 TAKANO NAGOMI-MACHI  
TAMANA-GUN KUMAMOTO JAPAN  
865-0193  
TEL +81-968-86-4321

Approval (Engineer)	Check				Design
	(Sales)	(Planning)	(QA)	(Legal)	
<i>M. Higashi</i>	<i>AB</i>	<i>Lat</i>	<i>Tomoko</i>	<i>M. Nosu</i>	<i>J. Yamada</i>



## Contents

1. Applications
2. Features
3. Write Speed
4. Specifications
5. Appearance
6. Reliability
7. Safety
8. Shock/Vibration
9. Life
10. Interface
11. Power Management
12. Serial ATA Features
13. Spindle Control
14. Dimension
15. Notes
16. Information for Laser
17. Drive Circuit (MD/DA)
18. Attached Sheets

## 1.Applications

- a) This specification describes the general specs and performance of BD Drive UJ260.
- b) In case major modification to improve performance and in the event that the device does not perform as specified, the stipulation requires that modification and solution should be made with mutual discussion, following the stipulations stated in this specification.
- c) Some components which are different in appearance and performance may be mixedly used owing to multiple sourcing and owing to common use with different models caused by decreased production quantity.
- d) Product to be marked which is compatible HHS Class 1 Standard in the USA.
- e) In the process of manufacturing of the products including packaging, any materials related ozone destructive items are not used at all.
- f) PSN in this document stands for Panasonic System Networks Co., Ltd.
- g) Special clause.  
We will endeavor to do our best for maintaining the control of quality, however,
  - 1) We want you to confirm the safety of the product in which PSN product is incorporated.  
If there is a problem with our product, be requested to advice the problem before shipment to the market.  
:Be requested to do the test for confirmation of the product which installs PSN product, following applicable rules and regulations.  
:Be requested to confirm the safety from abnormal usage under the condition installed.  
:Be requested to confirm the safety for reliable test under the condition installed.
  - 2) Be requested to provide necessary information how to use and how to install to the customers with the expectation that minimize unexpected accident from unexplained specification in this stipulation.
  - 3) In case, owing to the quality problem from this product, if there is a possibility to endanger the life of the user or property, please be requested to take double safety counter-measures by having enough tolerance over the assured specification and performance stated in this spec. from the point of product liability issue.
  - 4) Transcription and duplication of this document without prior consent is prohibited.
  - 5) Duration of limited warranty is 15 months after date manufactured.
  - 6) Duration of repair is 3 years after the following month of the end of manufacturing.
  - 7) Our trademark "Panasonic" shall not be printed on any products according to our mutual consultation between customer and Panasonic.

## 2.Features

### 1) Built-in Type for PC

### 2) Read speed

DVD-ROM	:Max 8X CAV
CD-ROM	:Max 24X CAV
BD-ROM	:2.0x CLV(for Video)/Max 6X CAV(for Data)

### 3) Maximum Write speed

CD-R	:Max.24X CAV
CD-RW	:4X CLV
High Speed CD-RW	:10XCLV
Ultra Speed CD-RW	:Max.16X Zone CLV
DVD-R	:Max.8X CAV
DVD-R DL	:Max.6X Zone CLV
DVD-RW	:Max.6X Zone CLV
DVD+R	:Max.8X CAV
DVD+R DL	:Max.6X Zone CLV
DVD+RW	:Max.8X Zone CLV
DVD-RAM	:3X-5X PAV ( 4.7GB)
BD-R (SL/DL)	:Max.6X CAV
BD-R (TL/QL)	:Max.4X Zone CLV
BD-RE (SL/DL/TL)	:2XCLV

### 4) Support Buffer Underrun Free Recording

### 5) Single +5V Power Supply

### 6) Zero Power(Device Attention with eject button) supported

### 7) The media for write check

CD-R	:TAIYO YUDEN Co.,Ltd. ,Mitsubishi Kagaku Media Co., Ltd. , Hitachi Maxell,Ltd.
CD-RW	:Mitsubishi Kagaku Media Co., Ltd.
HS CD-RW	:Mitsubishi Kagaku Media Co., Ltd.
DVD-R	:TAIYO YUDEN Co.,Ltd.
DVD-R DL	:Mitsubishi Kagaku Media Co., Ltd.
DVD-RW	:Victor Company of Japan, Ltd. (JVC) , Mitsubishi Kagaku Media Co., Ltd.
DVD+R	:Mitsubishi Kagaku Media Co., Ltd.
DVD+R DL	:Mitsubishi Kagaku Media Co., Ltd.
DVD+RW	:Mitsubishi Kagaku Media Co., Ltd.
DVD-RAM	:Panasonic Corporation , Hitachi Maxell,Ltd.
BD-R	:Panasonic Corporation
BD-RE DL	:Panasonic Corporation
BD-R TL	:TDK Corporation
BD-RE TL	:Panasonic Corporation

### 8)Access Speed

DVD-ROM SL	190ms (Typ.)	(Random)
CD-ROM	180ms(Typ.)	(Random)
BD-ROM SL	300ms(Typ.)	(Random)

## 3.Write Speed

The drive adjusts the write speed to the disc characteristics.

The optimal write speed to the disc may not be the maximum write speed.

Model Number : UJ260ABPU-B

## 4. Specifications

NO	Item	Specification	Condition
4-1	Power Supply		
	1.Operating Voltage	DC 5 V +/- 0.25V	
	2.Power Consumption	Peak 1800 mA (Max.)	Except inrush current (Less than 1ms)
		Read (CD) 1100 mA (typ.) Read (DVD) 950 mA (typ.) Read (BD) 950mA (typ.) Write 1350 mA (typ.) Standby 50 mA (typ.)	CD(TCD-002) DVD(KME-DVD001) BD-ROM(BLX-150) CD-R/DVD-R/BD-RE Max. Write Slumber mode
3. Ripple	100 mVp-p Max.		
4-2	Drive		
	1.Transfer Rate		
	(1) Read		
	DVD-ROM	MAX 8X CAV (MAX 10800 kB/s)	DVD-R for General
	CD-ROM	MAX 24X CAV (MAX 3600 kB/s)	
	BD-ROM	MAX 6X CAV (MAX 27 MB/s)	
	(2) Write		
	CD-R	4X (CLV), 8X (CLV), 24X (CAV)	
	CD-RW	4X (CLV)	
	HS-RW	10X (CLV)	
	US-RW	16x(ZCLV)	
	CD 8cm media	4xCLV	
	DVD-R	2X(CLAV),MAX. 4X (ZCLV), MAX.8X (CAV)	
	DVD-R DL	2X(CLAV),MAX.4X/6X(ZCLV)	
	DVD-RW	1X(CLAV), 2X(CLAV),MAX.4X/6X(ZCLV)	
	DVD+R	2.4X(CLAV),MAX.4X (ZCLV), MAX.8X (CAV)	
	DVD+R DL	2.4X(CLAV),MAX.6X(ZCLV)	
	DVD+RW	2.4X(CLAV), 3.3X(CLAV), MAX.4X /8X(ZCLV)	
	DVD-RAM	2X (CLV), 3X (CLV), 5X (PCAV)	4.7 / 9.4 GB
	DVD 8cm media	2X(CLAV), 2.4X(CLAV)	
	BD-R SL	2X (CLV), MAX.4X(ZCLV/PCAV),MAX.6X (CAV)	
	BD-R DL	2X (CLV), MAX.4X(ZCLV/PCAV),MAX.6X (CAV)	
BD-R TL	2X (CLV), MAX.4X(ZCLV)		
BD-R QL	2X (CLV), MAX.4X(ZCLV)		
BD-RE SL	2X (CLV)		
BD-RE DL	2X (CLV)		
BD-RE TL	2X (CLV)		
BD 8cm media	1X(CLAV)		
(3) SATA Interface	150 Mbyte/s		
2.Buffer Memory	2MB		
3.Error Rate			
(1) CD-ROM(with ECC)	less than 10 <sup>-12</sup> bit	<Access Time> using PSN's original test program and	
(without ECC)	less than 10 <sup>-9</sup> bit		
(2) DVD-ROM	less than 10 <sup>-12</sup> bit		
(3) BD-ROM	less than 10 <sup>-12</sup> bit		
4.Access Time	DVD-ROM 190 ms typ.(Random) CD-ROM 180 ms typ.(Random) BD-ROM 300mstyp.(Random)	DVD(KMEDVD001) CD(TCD-002) BD-ROM(BLX-150)	
5.Start up Time	less than 15s	Except Multi Session and Writable Media	
6.Stop Time	less than 6s		
7.Acoustic Noise	less than 50 dBA	ISO/JIS7779 (ANSI)	
8.Bus Encryption	Support		
9.Regional Code	"None"		
10.Inquiry Data	"BD-MLT UJ260"		

Model Number : UJ260ABPU-B


## 4. Specification (continue)

NO	Item	Specification	Condition
4-3	Applicable disc	C D: CD-ROM(12cm,8cm) CD-R,CD-RW DVD: DVD-ROM,DVD-R,DVD-R DL DVD-RAM,DVD-RW DVD+R, DVD+R DL,DVD+RW BD: BD-ROM,BD-R,BD-RE	Except abnormal shaped Disc
4-4	Applicable disc format	CD: CD-DA,CD-ROM,CD-ROM XA PhotoCD(multiSession) Video CD,CD-Extra(CD+),CD-text Hybrid SACD DVD: DVD-VIDEO, DVD-ROM, DVD-R(4.7GB), DVD-RW(Ver.1.1/1.2) , DVD-RAM DVD+R, DVD+R DL, DVD+RW DVD-R DL(Format1/4) BD: BD-ROM(1.3), BD-R(2.0),BD-RE(3.0)	CD Layer only           Format 1/4 Write support
4-5	Slope	Horizontal & Vertical ( -5 / +35 )	
4-6	Dimensions, Weight	128 x 129 x 12.7 mm ( W x D x H ) (except protrusion) 170 g +/- 10g	Upper cover-AL Bottom cover-AL
4-7	Eject	Soft Eject (with emergency eject hole)	

## 5. Appearance

NO	Item	Specification
5-1	Appearance	<ul style="list-style-type: none"> <li>- Any remarkable scratches, stains, sink mark, haze and burrs which degrade cosmetic are not allowed.</li> <li>- We may not accept it as custom components except front bezel.</li> <li>- No discoloration is allowed.</li> <li>- No contamination or objection lens or pick-up cover are allowed.</li> <li>- Marginal one will be judged by limitation samples which mutually agreed by both parties.</li> <li>- Front bezel Green LED indicator</li> </ul>

## 6. Reliability

NO	Item	Specification	Condition
6-1	Temperature	Operating guarantee : 5 to 50°C Non operating : -20 to 60°C  <div style="border: 1px solid black; padding: 5px; width: fit-content;">             Recommended position of temperature mesurment              in the case drive is built in to the PC.              (at the point "*" in the right figure)               Operating guarantee temperature : 55°C           </div>	
6-2	Humidity	Operating gurantee : 10 to 80% RH Non operating : 5 to 90% RH	The maximum wet-bulb temperature is 31°C
6-3	MTBF	60,000h (Duty : 20 %)	
6-4	MTTR	30min	

Model Number : UJ260ABPU-B

## 7.Safety

NO	Item	Specification	Condition
7-1	Safety	UL / cUL (UL 60950-1 / CSA C22.2 No. 60950-1) TUV (EN 60950-1)	Rated voltage : 5.0V Rated current : 1.6A
7-2	EMC	CE Marking (EMC Directive 2004/108/EC) EN 55022 EN 55024	
7-3	LASER	21 CFR Subchapter J (Class 1 laser product) IEC 60825-1/EN 60825-1 (Class 1 laser product)	

**Note** : This model is compliant to HHS and EN60825-1 as Class 1 Laser, so information of laser must be presented in user instruction or operation manual which is supplied to end user.  
Information for laser : Refer to the attached sheet.

## 8.Shock/Vibration

NO	Item	Specification	Condition
8-1	Shock 1.Operating :Read	19.6m/s <sup>2</sup> (2.0 G) (11ms X,Y,Z) : CD-DA 58.8m/s <sup>2</sup> (6.0 G) (11ms X,Y,Z) : CD-ROM/DVD-ROM/BD-ROM	CD-DA CD-ROM/DVD-ROM/BD-ROM possibility of retry at read
	:Write 2.Non Operating	4.9m/s <sup>2</sup> (0.5 G) ( 11ms X,Y,Z) 588m/s <sup>2</sup> (60.0 G) (11ms X,Y,Z) 1960m/s <sup>2</sup> (200 G) ( 2ms X,Y,Z)	
8-2	Vibration 1.Operation :Read	1.96m/s <sup>2</sup> (0.2 G) ( 5 ~ 500Hz )	
	:Write 2.Non Operating	0.98m/s <sup>2</sup> (0.1 G) ( 5 ~ 500Hz ) 19.6m/s <sup>2</sup> (2.0 G) (10 ~ 500Hz X,Y,Z 2h )	

## 9.Life

NO	Item	Specification	Condition
9-1	Life		
	1.Laser (at 25°C)	2000 h	
	2.Spindle Motor	3000 h	
	3.Feed Motor	current alteration within 30 % from initial 250,000 times	
	4.FPC (Feed Motor)	current alteration within 30 % from initial 250,000 times	
	5.Disc Insertion	10,000 times	
	6.Eject Button	10,000 times	
7.Loading	10,000 times		




Model Number : UJ260ABPU-B

## 10. Interface

## 10-1. Connector

## (1) Connector layout



Back side view

## (2) Connector pin assignment

## Interface description (signal)

Pin	Signal	
S1	Gnd	
S2	A+	Differential signal pair A
S3	A-	
S4	Gnd	
S5	B-	Differential signal pair B
S6	B+	
S7	Gnd	

## Interface description (power)

Pin	Signal	
P1	DP	Device Present ( 1K $\Omega$ pull down)
P2	+5V	5V power
P3	+5V	5V power
P4	MD / DA	Manufacturing Diagnostic/ Device Attention *1
P5	Gnd	
P6	Gnd	

\*1 : See 23/31 page

## DC Characteristics

Parameter	Signal Level		
	min	typ	max
Signal Detection Threshold (mV)	50	100	200
Tx Differential Output Voltage (mV)	400	500	600
Rx Differential Input Voltage (mV)	325	400	600
Tx Pair Differential Impedance (ohm)	85	100	115
Rx Pair Differential Impedance (ohm)	85	100	115

Model Number : UJ260ABPU-B

10. Interface (continue)  
10-2. SATA command

### Packet Commands Supported by Drives


00h	TEST UNIT READY	53h	RESERVE TRACK/RZONE
01h	REZERO UNIT	54h	SEND OPC INFORMATION
03h	REQUEST SENSE	55h	MODE SELECT(10)
04h	FORMAT UNIT	58h	REPAIR RZONE
08h	READ(6)	5Ah	MODE SENSE(10)
0Ah	WRITE(6)	5Bh	CLOSE TRACK/RZONE/SESSION/BORDER
0Bh	SEEK(6)	5Ch	READ BUFFER CAPACITY
12h	INQUIRY	5Dh	SEND CUE SHEET
15h	MODE SELECT(6)	A1h	BLANK
1Ah	MODE SENSE(6)	A3h	SEND KEY
1Bh	START/STOP UNIT	A4h	REPORT KEY
1Eh	PREVENT/ALLOW MEDIUM REMOVAL	A5h	PLAY AUDIO(12)
23h	READ FORMAT CAPACITIES	A7h	SET READ AHEAD
25h	READ CAPACITY	A8h	READ(12)
28h	READ(10)	AAh	WRITE(12)
2Ah	WRITE(10)	ACh	GET PERFORMANCE
2Bh	SEEK(10)	ADh	READ DVD STRUCTURE
2Eh	WRITE AND VERIFY(10)	A Eh	WRITE AND VERIFY(12)
2Fh	VERIFY(10)	AFh	VERIFY(12)
35h	FLUSH (SYNCHRONIZE) CACHE	B6h	SET STREAMING
37h	READ DEFECT DATA	B9h	READ CD MSF
3Bh	WRITE BUFFER	BAh	SCAN
3Ch	READ BUFFER	BBh	SET CD SPEED
42h	READ SUB-CHANNEL	BDh	MECHANISM STATUS
43h	READ TOC/PMA/ATIP	BEh	READ CD
44h	READ HEADER	BFh	SEND DVD STRUCTURE
45h	PLAY AUDIO(10)	E8h	READ MICROCODE
46h	GET CONFIGURATION	EAh	WRITE MICROCODE
47h	PLAY AUDIO MSF	F5h	SYNCHRONIZE MICROCODE
4Ah	GET EVENT /STATUS NOTIFICATION		
4Bh	PAUSE/RESUME		
4Eh	STOP PLAY/SCAN		
51h	READ DISC INFORMATION		
52h	READ TRACK/RZONE INFORMATION		

### ATA Commands Supported by Drives

E5h	CHECK POWER MODE	00h	NOP
08h	DEVICE RESET	A0h	PACKET
90h	EXECUTE DEVICE DIAGNOSTIC	EFh	SET FEATURES
A1h	IDENTIFY PACKET DEVICE	E6h	SLEEP
E1h	IDLE IMMEDIATE	E0h	STANDBY IMMEDIATE

## 11. Power Management

### 11-1. Status Changes

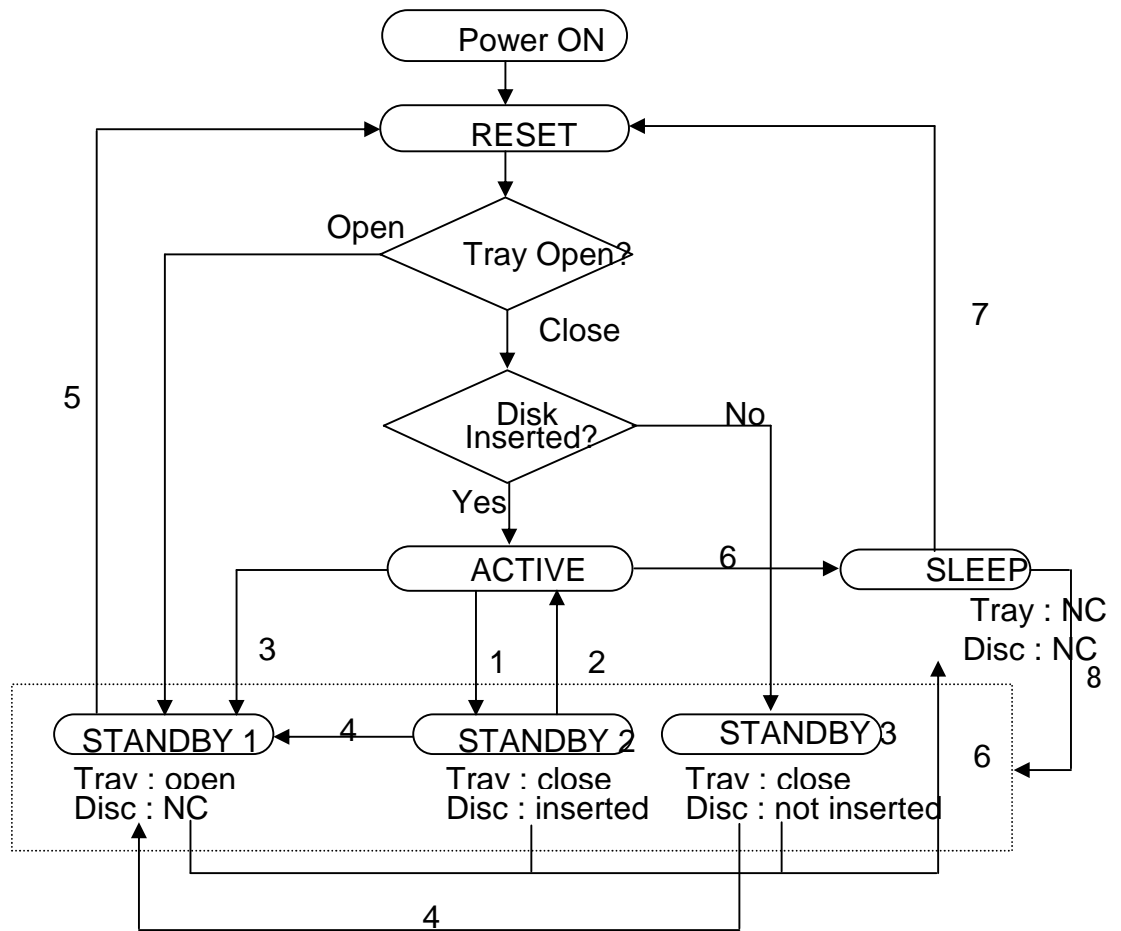

\* Electrical status in a drive is same at STANBY1,2,3

- 1: At first host executes reset sequence after power is supplied. If a disc is attached and a tray is closed, the drive status becomes ACTIVE Mode. And next If host doesn't execute command for certain time(default 30 sec) a disc stops, and changes STANDBY Mode .In the case of receiving ATAPI command(Standby Immediate),the drive status changes STANDBY Mode soon.
- 2: In the case of STANDBY Mode at the status that a disc is attached and a tray is closed, if the drive receives command from host, the drive status changes ACTIVE Mode soon.
- 3: In the case of ACTIVE Mode, a disc is stopped and a tray is opened by ATAPI eject command or pushing eject button at front bezel. And next the drive status change STANDBY Mode again.

Model Number : UJ260ABPU-B

## 11. Power Management (continue)

### 11-1. Status Changes (continue)

- 4: In the case of STANDBY Mode, a disc is stopped and a tray is opened by ATAPI eject command or pushing eject button at front bezel. And next the drive status change STANDBY Mode again.
- 5: In the case of STANDBY Mode at the status that a tray is opened, this drive executes reset sequence by closing a tray. And next If a disc is attached, the drive spin a disc and changes ACTIVE Mode.
- 6: In the case of ACTIVE or STANDBY mode, this drive goes into Sleep mode immediately after receiving of Sleep Command.  
The only way to recover from SLEEP mode is with a software reset or hardware reset.
- 7: The drive status can recover by hard or soft reset(in the case of SSP disable).  
And next the drive status becomes the same sequence with reset status.
- 8: In the case of SSP enable, the drive goes into STANBY mode immediately after receiving of soft reset.

### ACTIVE Mode

At first a disc is attached and a tray is closed after power is supplied. And next the drive checks itself. If this check finished perfectly, the drive spin a disc and read TOC.  
ACTIVE Mode stands for this status that the drive finish reading TOC.  
So laser, spindle motor, and sled motor active.

### STANDBY Mode

This mode is a low current consumption mode.  
STANDBY Mode stands for this status that only SATA interface active. So laser, spindle motor, and sled motor doesn't active.

### SLEEP Mode

This mode is a low current consumption mode.  
SLEEP Mode stands for this status that all system(laser, spindle motor, sled motor, SATA interface) doesn't active. The drive can recover by hard/soft reset.

Model Number : UJ260ABPU-B

## 12. Serial ATA Features

## 12-1. Serial ATA Features Specification

NO	Item	Specification	
12-1	HIPM ( Host Initiated link Power Management )	Support	
12-2	DIPM ( Device Initiated link Power Management )	Support	Partial Timer : 10ms Slumber Timer 30ms (time after a drive handles the last command)
12-3	AN ( Asynchronous Notification )	Support	
12-4	SSP ( Software Setting Preservation )	Support	
12-5	SSC ( Spread Spectrum Clocking )	Support	

\*Both host controller and optical drive need to support HIPM ,DIPM and AN mode to utilize them.

## 12-2. Link Power Management State

Serial ATA interface power states are controlled by the device and host controller.  
The interface power states are defined as below.

## PHYRDY

The Phy logic and main PLL are both on and active. The interface is synchronized and capable of receiving and sending data.

## PARTIAL

The Phy logic of SATA interface is powered, but is in a reduced power state.  
Power dissipation in this mode is less than the PHYRDY mode, but more than the SLUMBER mode.  
The exit latency from this state shall be no longer than 10 us.

## SLUMBER


The Phy logic of SATA interface is powered, but is in a reduced power state.  
Power dissipation in this mode is less than the PARTIAL mode.  
The exit latency from this state shall be no longer than 10 ms.

## 12. Serial ATA Features (continue)

## 12-3.HIPM( Host Initiated link Power Management )

HIPM is a method which controls Serial ATA interface power states by host controller. Logical Unit supports this feature. Host shall issue IDENTIFY PACKET DEVICE before initiate power management transition requests, and check the response data whether HIPM is supported or not.

## 12-4. HIPM State Changes

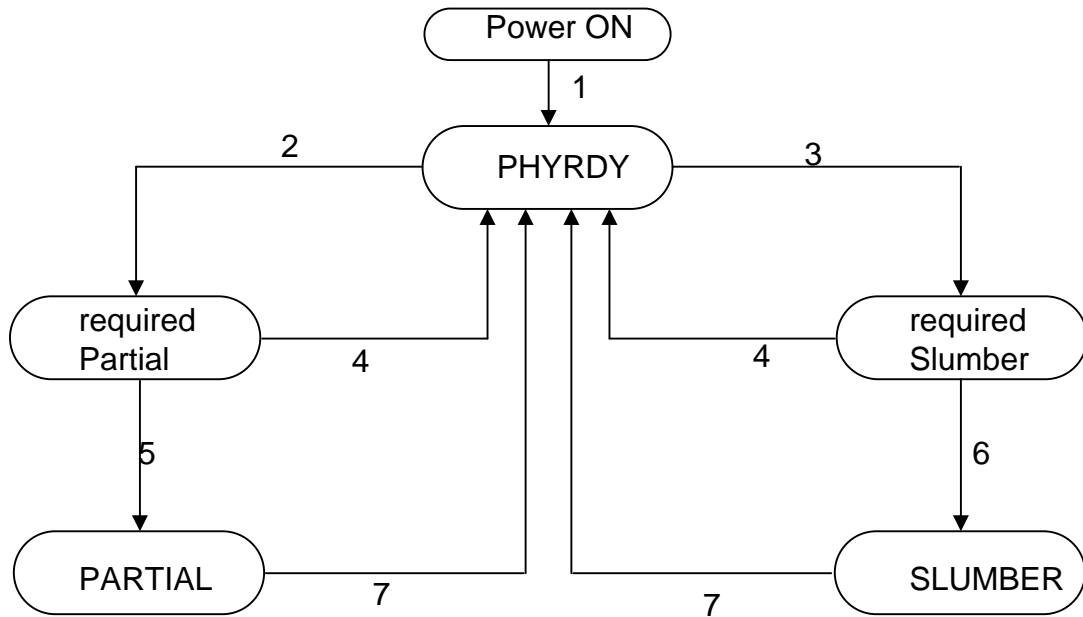

1: A power-on or hard reset always returns the Interface Power State to the PHYRDY state from any state.

2: In the case of required Partial, the drive receive PMREQ\_P from host.

3: In the case of required Slumber, the drive receive PMREQ\_S from host.

4: If the drive issues PMNAK, the status changes into PHYRDY.

5: If the drive issues PMACK, the status changes into PARTIAL.

6: If the drive issues PMACK, the status changes into SLUMBER.

7: If the drive or host issues COMWAKE(or COMRESET/COMINIT), the status changes into PHYRDY.


## 12. Serial ATA Features (continue)

## 12-5. DIPM ( Device Initiated link Power Management )

DIPM is a method which controls Serial ATA interface power states by the Logical Unit.

The Logical Unit has internal timers, Partial Timer and Slumber Timer , and the timer provide for the Logical Unit to change Interface Power State without direct HOST request. The disabled/enabled of DIPM can be switched by using SET FEATURE command.

## 12-6. DIPM State Changes

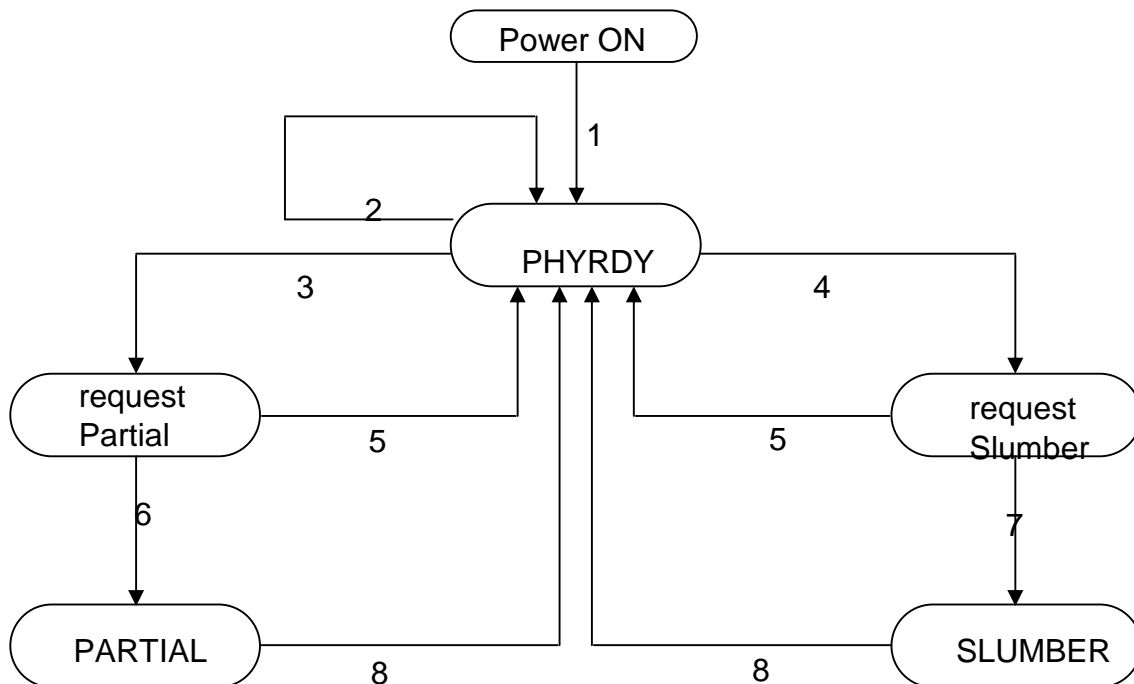

1: A power-on or hard reset always returns the Interface Power State to the PHYRDY state from any state.

2: If the drive received command, the drive keep PHYRDY state and resets the Partial/Slumber Timer.

3: If the drive is IDE interface and the Partial timer reaches zero, the drive issues PMREQ\_P.

4: If the drive is IDE interface and the Slumber timer reaches zero, the drive issues PMREQ\_S.

5: If the drive received PMNAK from Host, the status changes into PHYRDY.

6: If the drive received PMACK from Host, the status changes into PARTIAL.

7: If the drive received PMACK from Host, the status changes into SLUMBER.

8: If the drive or host issues COMWAKE(or COMRESET/COMINIT), the status changes into PHYRDY. If the drive changes Interface Power State from PARTIAL to SLUMBER, the drive issues COMWAKE to enter PHYRDY state. And then, the drive requests to change the state into SLUMBER

## 12. Serial ATA Features (continue)

### 12-7. AN ( Asynchronous Notification )

Asynchronous notification is a mechanism for a device to send a notification to the host that the device requires attention. A few examples of how this mechanism could be used include indicating media has been inserted in an device.

### 12-8. SSP ( Software Setting Preservation )

When a device is enumerated, software configures the device using SET FEATURES and other commands. These software settings are often preserved across software reset but not necessarily across COMRESET. In Parallel ATA, only commanded hardware resets may occur, thus legacy mode software only reprograms settings that are cleared for the particular type of reset it has issued. In Serial ATA, COMRESET is equivalent to hardware reset and a noncommanded COMRESET may occur if there is an asynchronous loss of signal. Since COMRESET is equivalent to hardware reset, in the case of an asynchronous loss of signal some software settings may be lost without legacy mode software knowledge. In order to avoid losing important software settings without legacy mode driver knowledge, the software settings preservation ensures that the value of important software settings is maintained across a COMRESET. Software settings preservation may be enabled or disabled using SET FEATURES with a subcommand code of 06h . The feature is enabled by default.

The software settings that is preserved across COMRESET are listed below.

SET FEATURES (Set Transfer Mode): PIO, Multiword, and UDMA transfer mode settings established by the SET FEATURES command with subcommand code of 03h.

### 12-9. SSC ( Spread Spectrum Clocking )

The technique of modulating the operating frequency of a signal slightly to spread its radiated emissions over a range of frequencies. This reduction in the maximum emission for a given frequency helps meet radiated emission requirements.



Model Number : UJ260ABPU-B

## 13. Spindle Control

## 13-1. Normal disc

Disc Type	Sector Format	CD-ROM/CD-R Closed Session	CD-RW Closed Session	CD-R Open Session	CD-RW Open Session
Audio Only Disc	CD-DA (Data read) (Audio play)	Max 20X CAV	Max 20X CAV	8xCLV	8xCLV
		Max 10X CAV	Max 10X CAV	-	-
Data Only Disc	Mode1/Mode2Form1 (CD-ROM,PhotoCD)	Max 24X CAV	Max 24X CAV	Max 24xZCLV	Max 16xZCLV
	Mode2Form2 (VideoCD)	Max 10X CAV	Max 10X CAV	8xCLV	8xCLV
Mixed disc (CD-extra)	Mode1/Mode2Form1	Max 24X CAV	Max 24X CAV	Max 24xZCLV	Max 16xZCLV
	Mode2Form2	Max 20X CAV	Max 20X CAV	8xCLV	8xCLV
	CD-DA (Data read) (Audio play)	Max 20X CAV	Max 20X CAV	8xCLV	8xCLV
8cm CD	Data Read	Max 10X CAV	Max 10X CAV	-	-
		Max 12X CAV	Max 12X CAV	4xCLV	4xCLV

Disc type	Condition	Spindle control		Remark
		12cm media	8cm media	
DVD-ROM Single	Data Read	Max 8X CAV	Max 4X CAV	
DVD-ROM Dual	Data Read	Max 8X CAV	Max 4X CAV	
DVD-Video	Data Read	Max 4X CAV	Max 4X CAV	
DVD-R(4.7G)	Data Read	Max 8X CAV	Max 4X CAV	
DVD-R DL	Data Read	Max 8X CAV	Max 4X CAV	
DVD-RW(Ver1.1/1.2)	Data Read	Max 8X CAV	Max 4X CAV	
DVD+R	Data Read	Max 8X CAV	Max 4X CAV	
DVD+R DL	Data Read	Max 8X CAV	Max 4X CAV	
DVD+RW	Data Read	Max 8X CAV	Max 4X CAV	
DVD-RAM	Data Read	Max 3X-5X PCAV	Max 2X ZCLV	

Disc type	Condition	Spindle control		Remark
		12cm media	8cm media	
BD-ROM SL	Data Read	Max 6X CAV	Max 1.6X CLV	2.0X at AV Contents
BD-ROM DL	Data Read	Max 6X CAV	Max 1.6X CLV	2.0X at AV Contents
BD-RE SL	Data Read	Max 6X CAV	Max 1.6X CLV	2.0X at AV Contents
BD-RE DL	Data Read	Max 6X CAV	Max 1.6X CLV	2.0X at AV Contents
BD-RE TL	Data Read	Max 2X CLV	Max 2X CLV	2.0X at AV Contents
BD-R SL	Data Read	Max 6X CAV	Max 1.6X CLV	2.0X at AV Contents
BD-R DL	Data Read	Max 6X CAV	Max 1.6X CLV	2.0X at AV Contents
BD-R TL	Data Read	Max 4X ZCLV	Max 2X CLV	2.0X at AV Contents
BD-R QL	Data Read	Max 4X ZCLV	Max 2X CLV	2.0X at AV Contents

Model Number : UJ260ABPU-B

13-2 .Spindle motor control

(1) at playing CD-ROM

Linear Velocity	at 24XCAV	at 12XCAV	Remarks
1.2m/s <1.3m/s	4979 rpm	2490 rpm	at 1.2m/s proportion to linear velocity (1.2~1.3m/s)
1.3m/s	5394 rpm	2697 rpm	more than 1.3m/s

(2) at playing DVD-ROM

Disc	at 2.5XCAV	at 4XCAV	at 6XCAV	at 8XCAV
Single layer	1480 rpm	2369 rpm	3551 rpm	4735 rpm
Dual layer	1628 rpm	2605 rpm	3907 rpm	5210 rpm


(3) at playing BD-ROM

Disc	at 1.6XCLV	at 2XCLV	at 4XPCAV	at 6XCAV
SL/DL layer	3133 rpm	3916 rpm	3916 rpm	4860 rpm

(4) CD-R Write (Max 24xCAV)

CD-RW Write (Max 16xZCL)

[rpm]

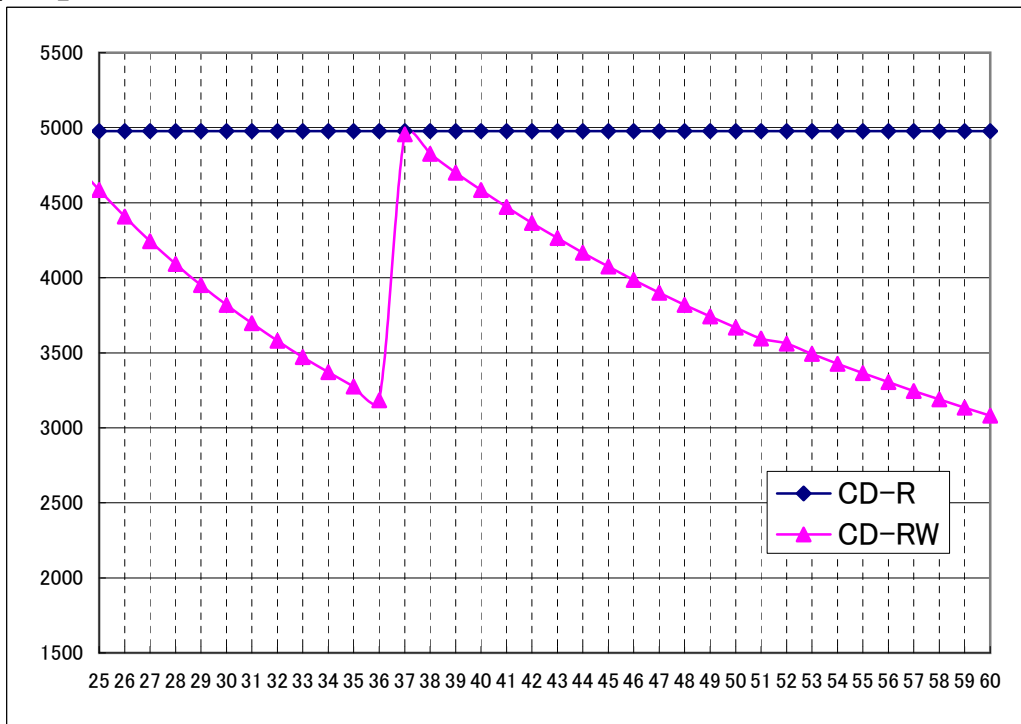

[mm]

Average Write Speed

CD-R	24x CAV	18.85x
CD-RW	10x-16x ZCLV	14.73x


Model Number : UJ260ABPU-B

(5) DVD±R Write ( MAX.8x CAV )

DVD-R DL(Max.6x ZoneCLV), DVD+R DL Write ( Max.6x Zone CLV )

DVD-RW(Max.6x ZoneCLV), DVD+RW Write ( Max.8x Zone CLV )

[rpm]

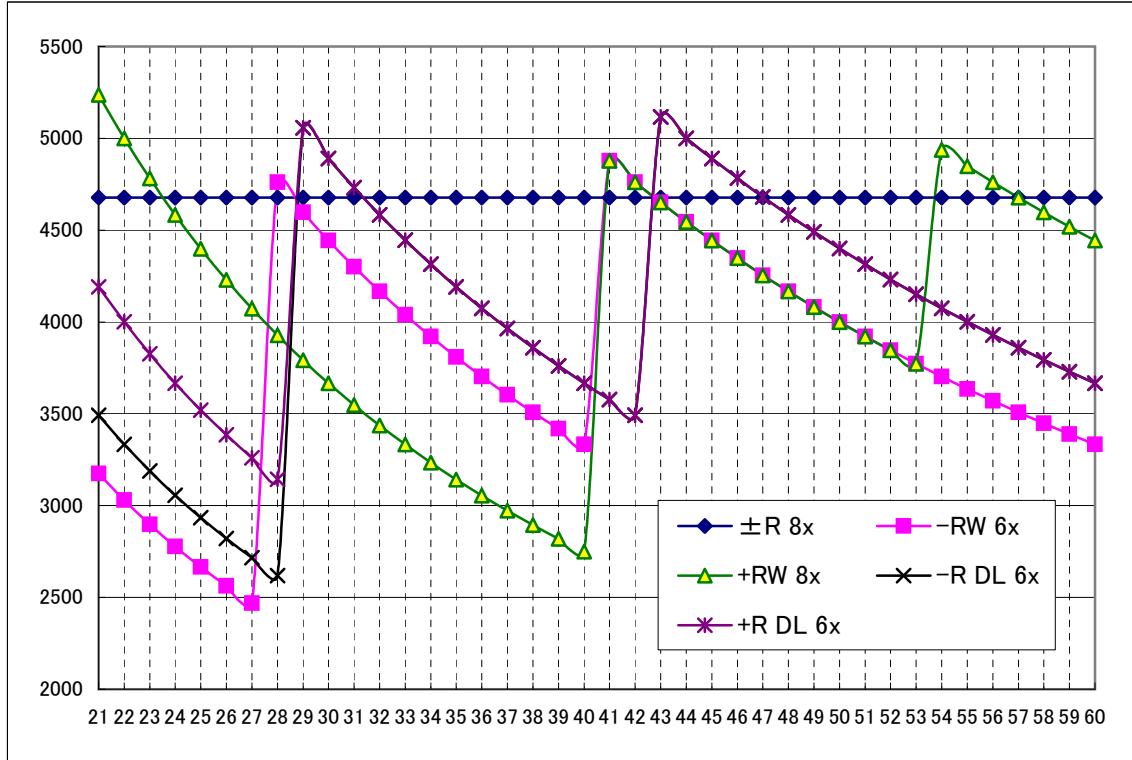

[mm]


Average Write Speed

DVD-R	8x CAV	5.8x
DVD+R	8x CAV	5.8x
DVD-R DL	2x-4x-6x ZCLV	4.48x
DVD+R DL	2.4x-4x-6x ZCLV	4.61x
DVD-RW	2x-4x-6x ZCLV	4.78x
DVD+RW	3.3x-6x-8x ZCLV	4.78x

Model Number : UJ260ABPU-B

(6) DVD-RAM(Max 3x-5x Partial CAV)

[rpm]

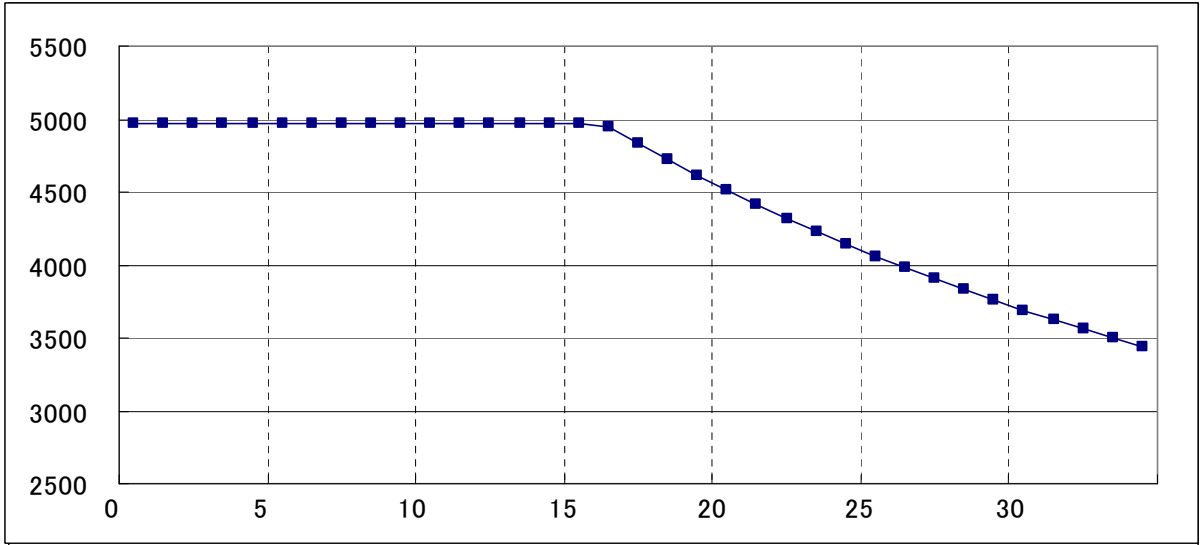


[Zone]

Average Write Speed

DVD-RAM	3x-5x PCAV	4.48x
---------	------------	-------

- (7) BD-R SL / DL (6x CAV)
- BD-R TL / QL (4x ZCLV)
- BD-RE SL / RE DL (2x CLV)
- BD-RE TL (2x CLV)

[rpm]

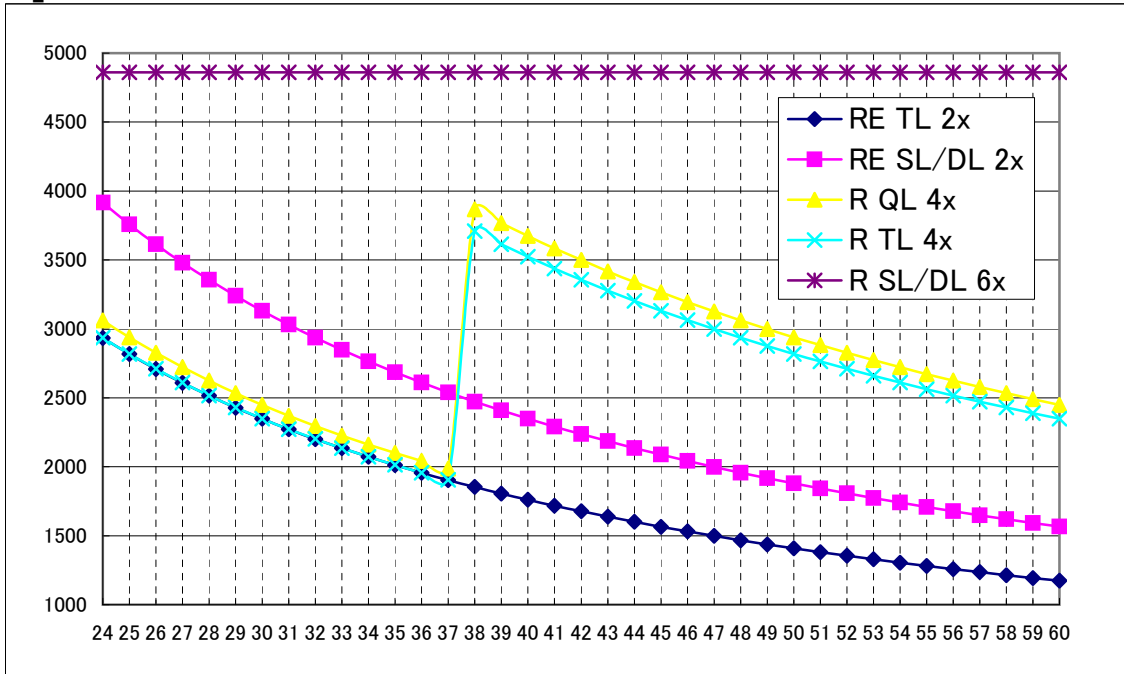

[mm]

Average Write Speed

BD-R SL/DL	6x CAV	4.5x
BD-R TL/QL	4x ZCLV	3.38x
BD-RE SL/DL/TL	2x CLV	2x

#### 14.Dimension

Refer to the following pages.

#### 15.Notes

a) This pickup is precisely assembled at our specialized assembly line. Please be requested not to disassemble or adjust this pickup.

#### b) Storage

- 1) Keep away from hot and high humidity environment.
- 2) Store them under the condition of not receiving abnormal shock from outside, by having static and dust protecting measures.
- 3) Keep the dust cover for the protection from dust.

#### c) Handling

- 1) Keep away from strong shock such as dropping.
- 2) Never touch objective lens.
- 3) Be careful not to be dusted on the objective lens.
- 4) In case, dust is on the objective lens, sweep away the dust with clean air.
- 5) Worker involved should be secured with "ground".
- 6) Workshop and tool must be grounded securely.
- 7) Never be so close with magnetic material since actuator portion holds strong magnet circuit. ( Iron dust, screws, iron-pins in driving area cause problems.)
- 8) Don't push the cover of the Drive.
- 9) Fragile. Handle with care.

#### d) Installation of a drive

Torque for tightening screws must be equal to or less than 0.2Nm(2kgf-cm),when a drive is fixed with.

Model Number : UJ260ABPU-B

## 16. Information for Laser / UJ260 series

**Information For the User**

This product utilizes a laser.


Use of control, adjustment or performance of procedures other than those specified herein may result in hazardous radiation exposure.

Do not open covers and do not repair yourself. Refer servicing to qualified personnel.

**Laser properties of the Drive**

Laser Class Class 1 (HHS and IEC 60825-1)

Wavelength	for CD	783 nm
	for DVD	661.5 nm
	for Blu-ray	405nm

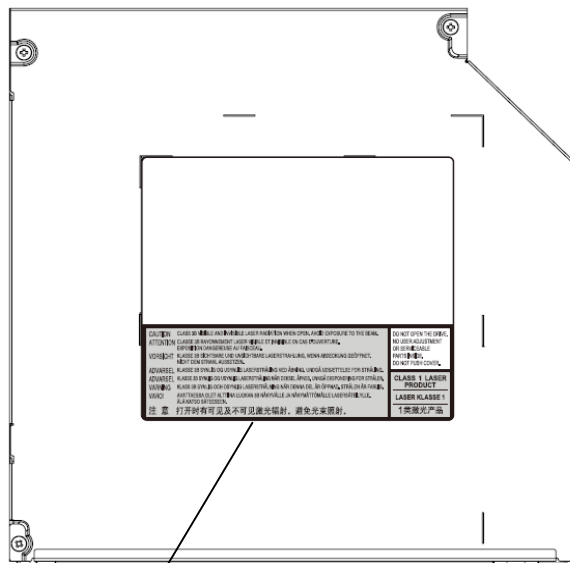**Location of Labeling**

<b>CAUTION</b>	CLASS 3B VISIBLE AND INVISIBLE LASER RADIATION WHEN OPEN, AVOID EXPOSURE TO THE BEAM.
<b>ATTENTION</b>	CLASSE 3B RAYONNEMENT LASER VISIBLE ET INVISIBLE EN CAS D'OUVERTURE, EXPOSITION DANGEREUSE AU FAISCEAU.
<b>VORSICHT</b>	KLASSE 3B SICHTBARE UND UNSICHTBARE LASERSTRAHLUNG, WENN ABDECKUNG GEÖFFNET, NICHT DEM STRAHL AUSSETZEN.
<b>ADVARSEL</b>	KLASSE 3B SYNLIG OG USYNLIG LASERSTRÅLING VED ÅBNING, UNNGÅ UDSÆTTELSE FOR STRÅLING.
<b>ADVARSEL</b>	KLASSE 3B SYNLIG OG USYNLIG LASERSTRÅLING NÅR DEKSEL ÅPNES, UNNGÅ EKSPONERING FOR STRÅLEN.
<b>VARNING</b>	KLASS 3B SYNLIG OCH OSYNLIG LASERSTRÅLNING NÅR DENNA DEL ÄR ÖPPNAD, STRÅLEN ÄR FARLIG.
<b>VARO!</b>	AVATTAESSA OLET ALTTIINA LUOKAN 3B NÄKYVÄLLE JA NÄKYMÄTTÖMÄLLE LASERSÄTEILYLLE, ÄLÄ KATSO SÄTEESEEN.
<b>注意</b>	打开时有可见及不可见激光辐射。避免光束照射。

DO NOT OPEN THE DRIVE,  
NO USER ADJUSTMENT  
OR SERVICEABLE  
PARTS INSIDE.  
DO NOT PUSH COVER.


**CLASS 1 LASER  
PRODUCT**

**LASER KLASSE 1**

**1类激光产品**

Model Number : UJ260ABPU-B

## 17. Drive Circuit (MD/DA)

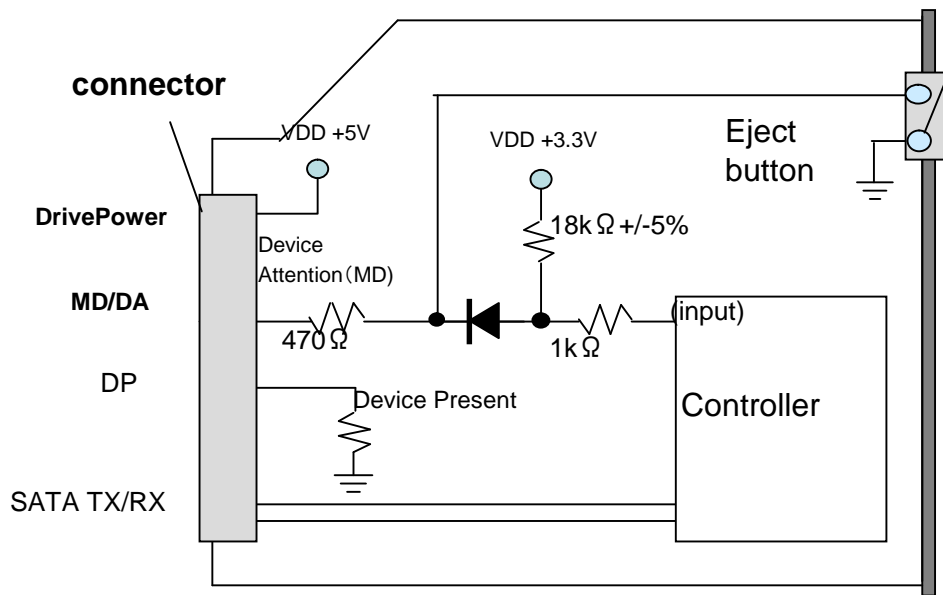

When you use the function of DA, please contact us for discussion.

# 添付資料

(Attached Sheets)

## 目次


(Content)

- 1 . 外觀図 (Outline)
- 2 . 包装仕様 (Packaging specification)
- 3 . 銘板 (Label)
- 4 . 押圧分布図 (Loading Specification)



1. 外観図/Outline

注)コネクタに負荷のかからない取付構成としてください。  
Caution: The connector is attached to the PCB only by solder.  
Do not put excessive stress on the connector.

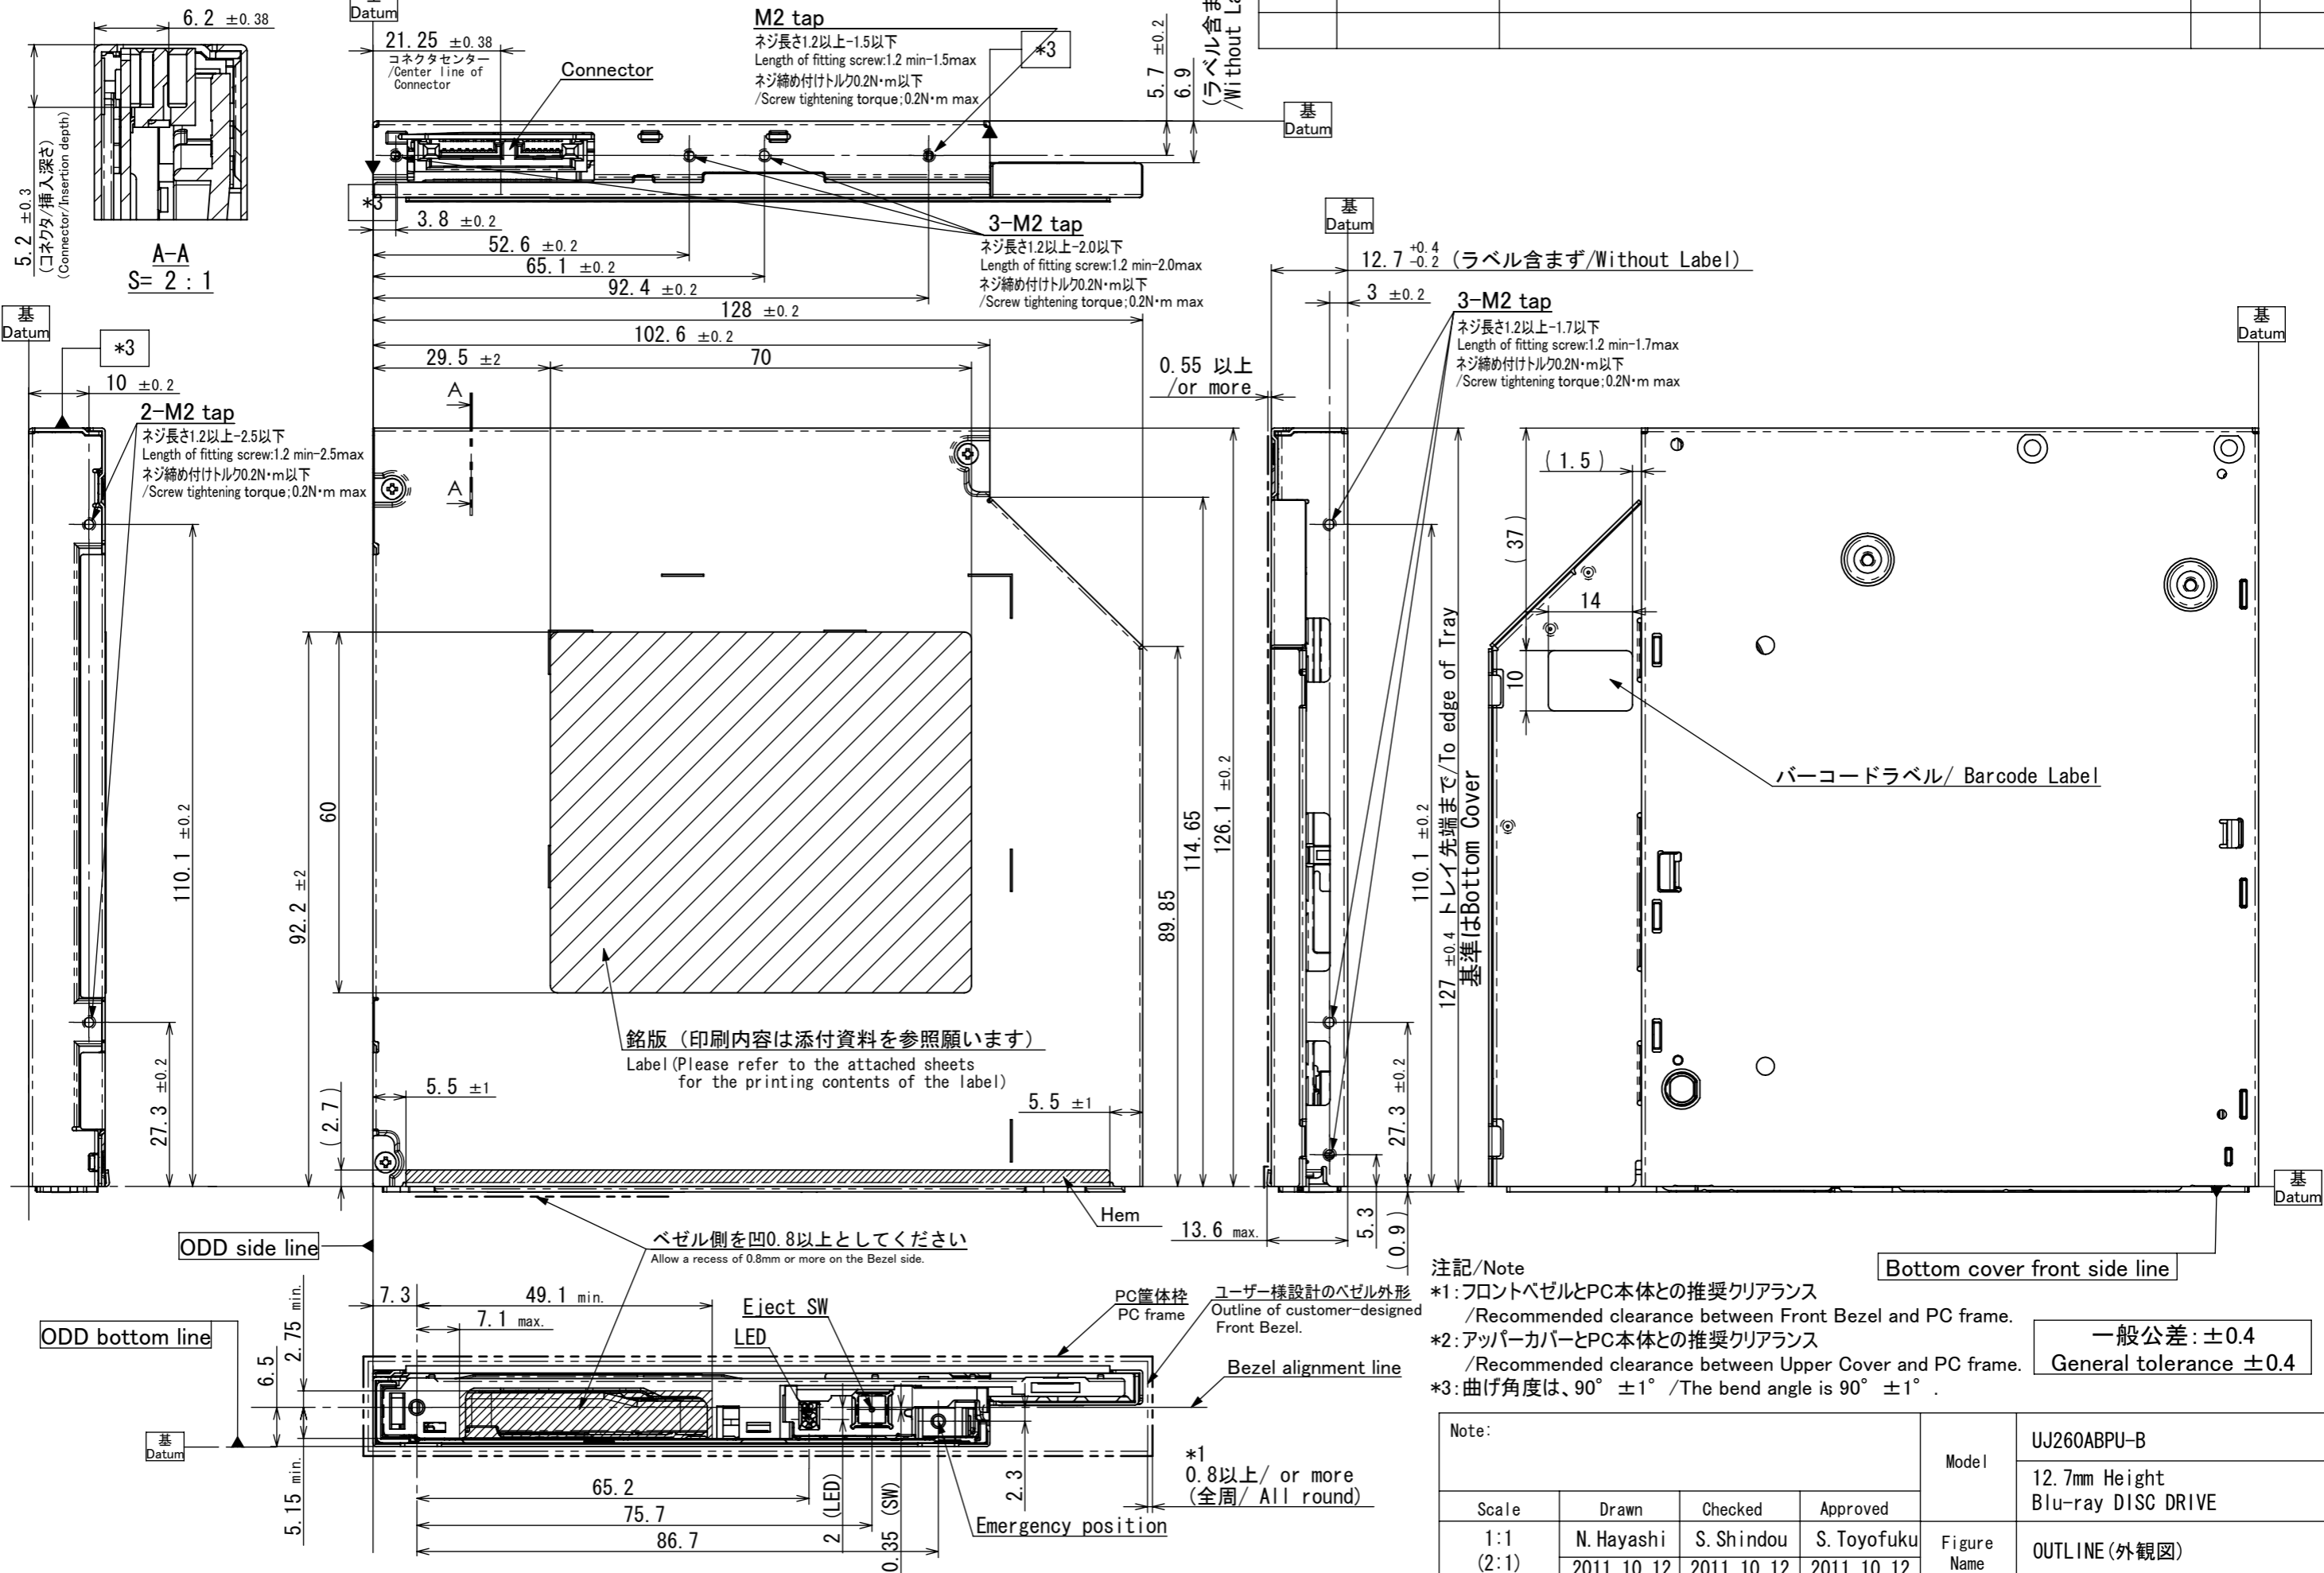

sym	Date	Revision	Signed	Checked

注記/Note




- \*1: フロントベゼルとPC本体との推奨クリアランス / Recommended clearance between Front Bezel and PC frame.
- \*2: アッパーカバーとPC本体との推奨クリアランス / Recommended clearance between Upper Cover and PC frame.
- \*3: 曲げ角度は、90° ± 1° / The bend angle is 90° ± 1°.

一般公差: ±0.4  
General tolerance ±0.4


Note:				Model	UJ260ABPU-B
Scale				Figure Name	12.7mm Height Blu-ray DISC DRIVE
1:1	Drawn	Checked	Approved	OUTLINE (外観図)	
(2:1)	N. Hayashi	S. Shindou	S. Toyofuku		

Model Number: UJ260ABPU-B


2 梱包仕様  
PACKAGING SPECIFICATION

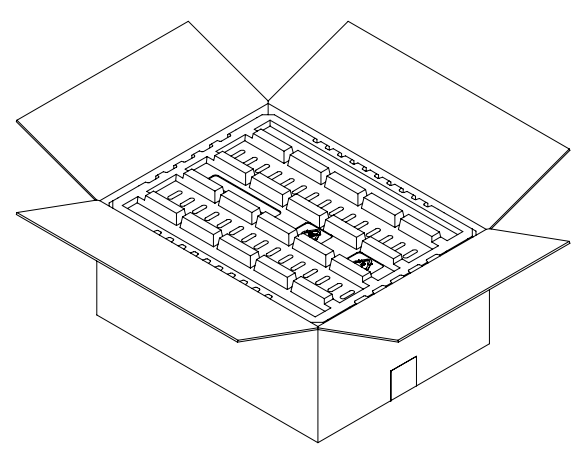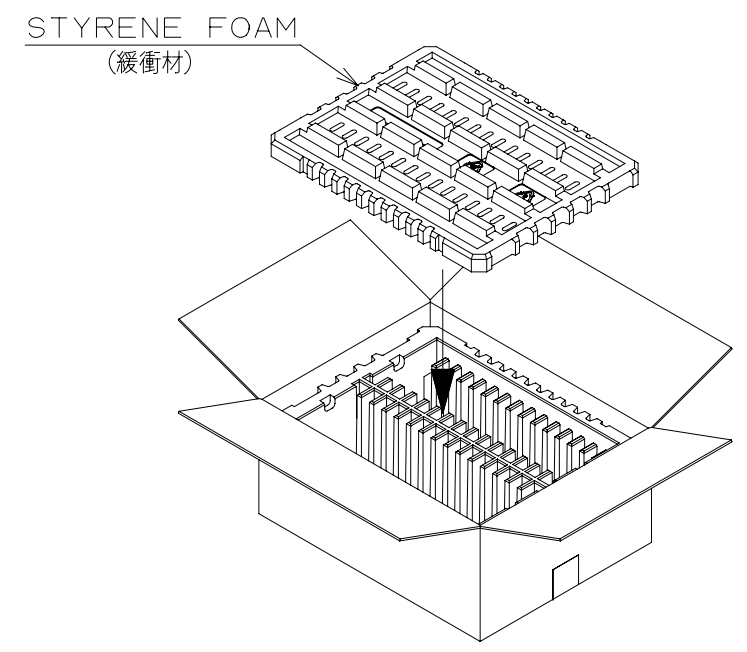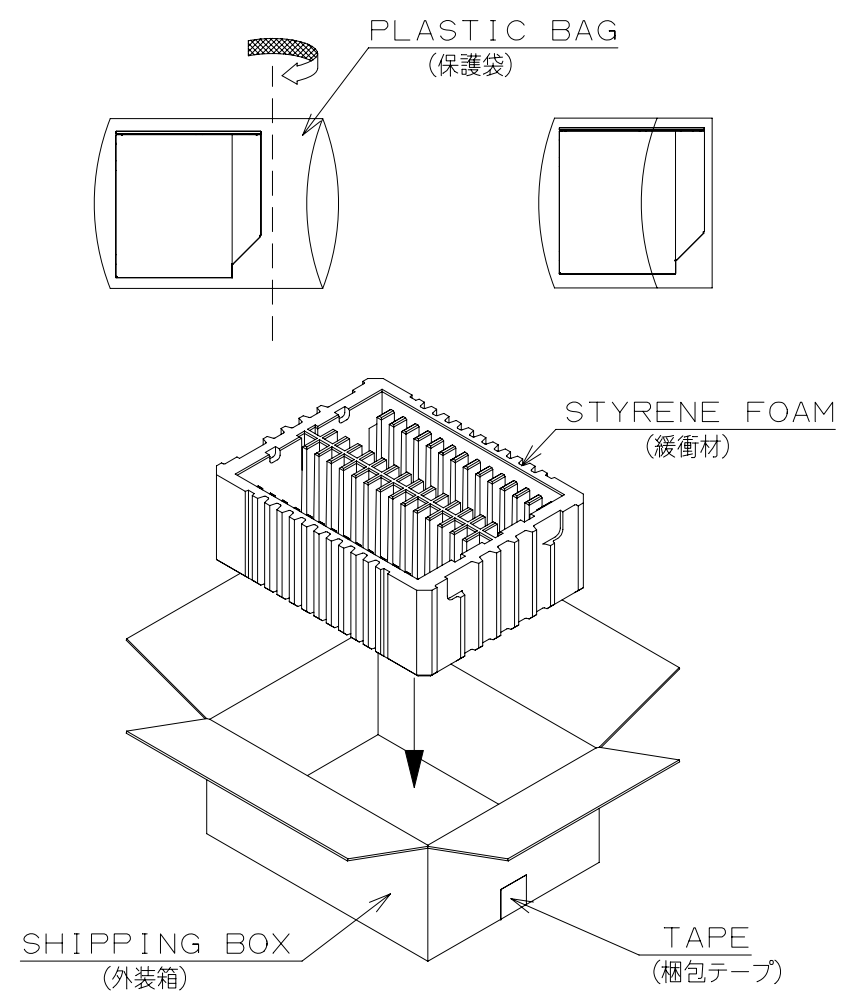

外装箱をテープにて閉じる  
Tape the box with packaging tape.

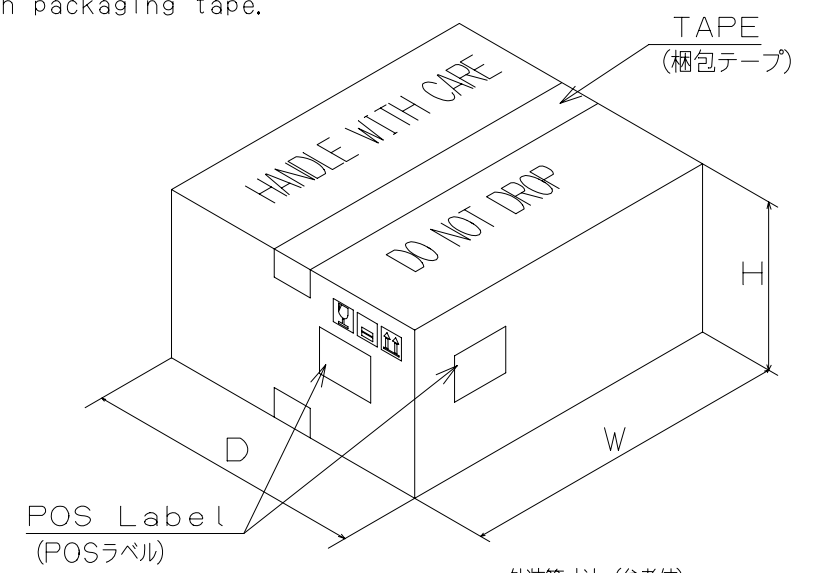

外装箱寸法 (参考値)  
box size (reference)  
W: 430mm  
D: 340mm  
H: 210mm

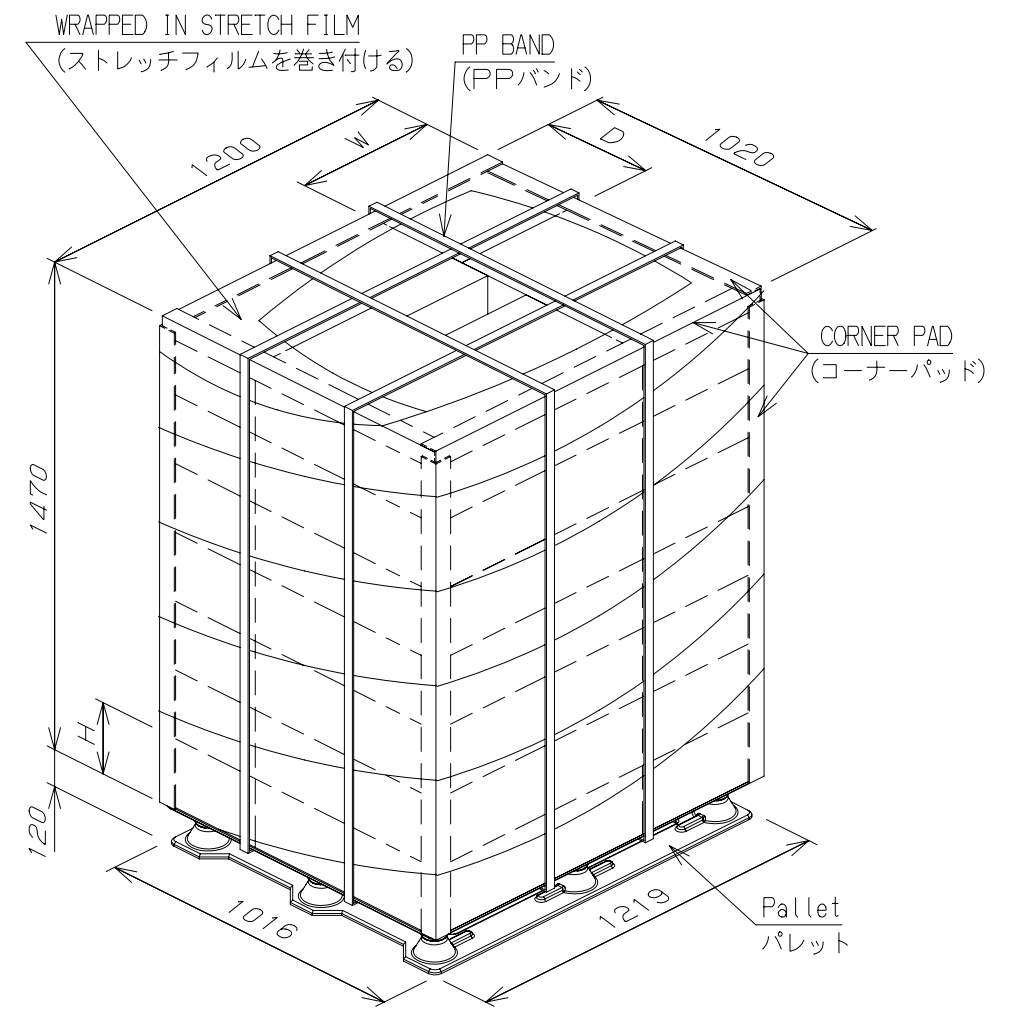


QUANTITY PER PALLET (1パレットの数量)

STACKING	NUMBER OF BOXES	NUMBER OF DRIVES
7	56	1680

Model Number: UJ260ABPU-B

### 3-1 銘板の印刷内容 Printout contents of the label

ユーザーにてこの2次元バーコードを御使用の場合は、連絡をお願いします。  
This 2D bar code is intended only for PSN internal use. Please contact PSN if you scan 2D bar code at manufacturing line.

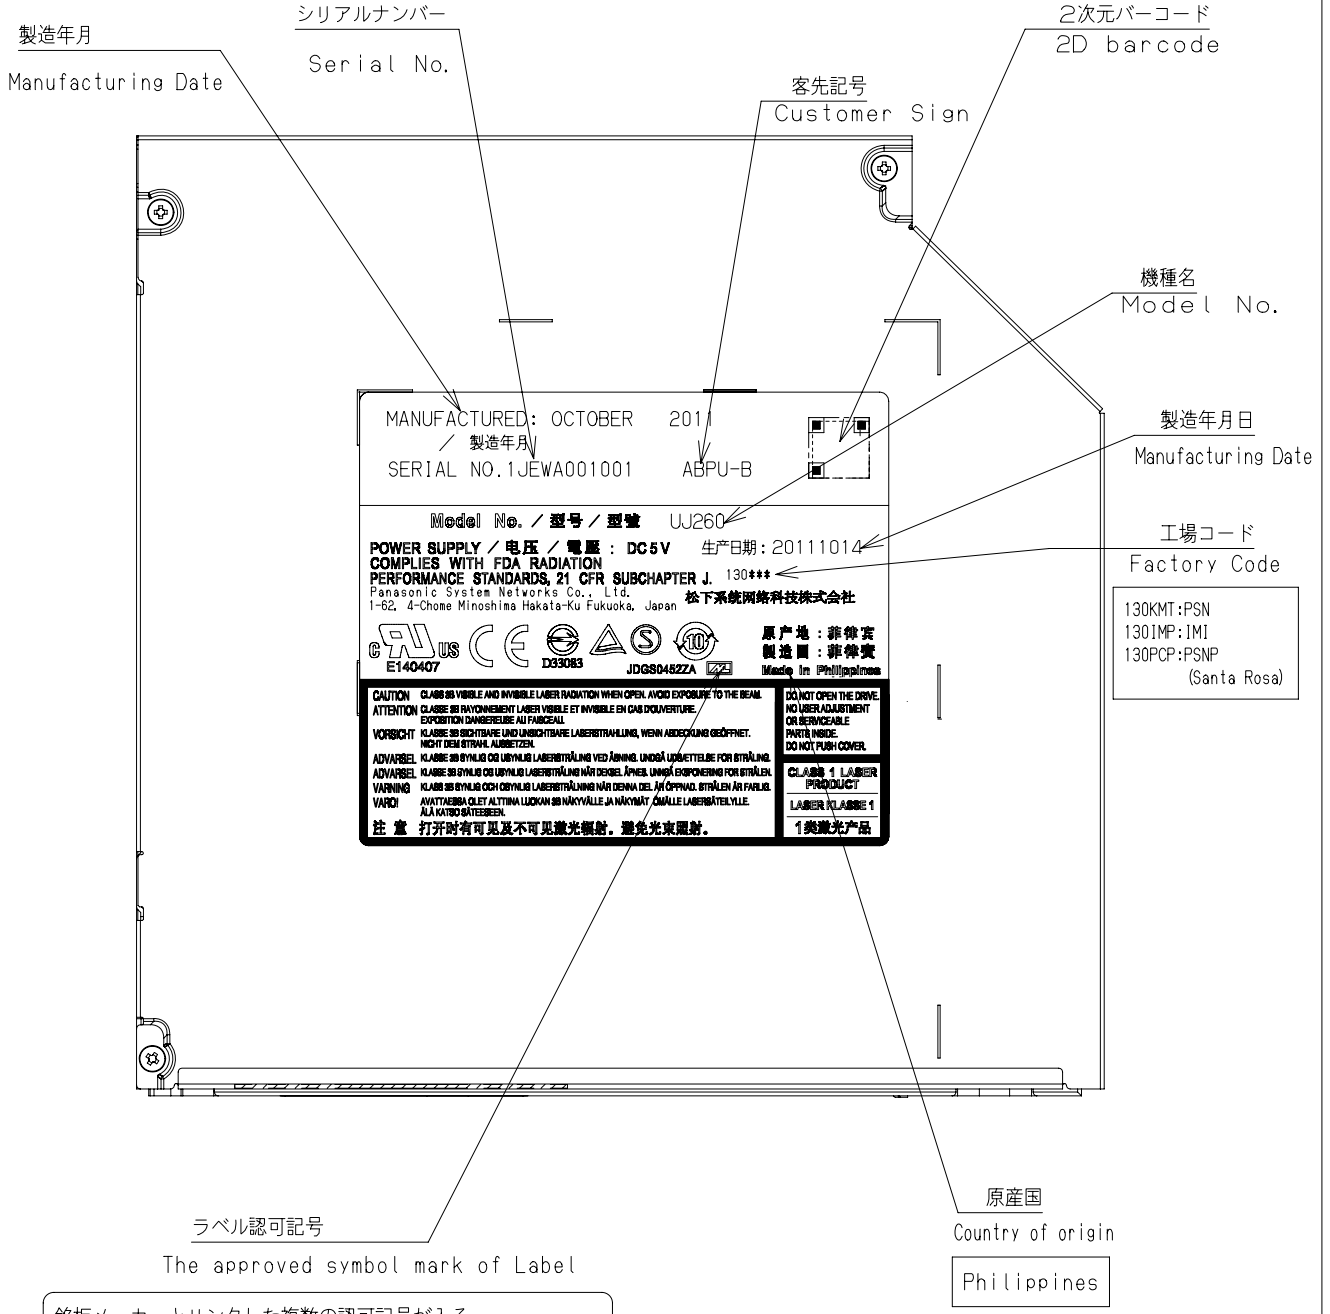

銘板メーカーとリンクした複数の認可記号が入る  
There is some approved symbol mark of Label that associated the label supplier.

130KMT:PSN  
130IMP:IMI  
130PCP:PSNP  
(Santa Rosa)

Philippines

3-2 銘板 (Label)

シリアルNo. / 製造年月 表示内容  
Contents of serial No. and Manufacturing date

(例) 1 J E W A \*\*\*\*\* \*\*--\*  
(Ex) 1 2 3 4 5 6 7

\* 製造年月は省略せずに記入すること  
Fill manufacturing date completely.

1. 製造年番号 (西暦年の末尾数字)  
Manufacturing Year  
(the last no. of year)

(例) OCTOBER 2011  
(Ex) 8 9

2. 製造月番号 (アルファベット)  
Manufacturing Month No.  
(alphabet)

8. 製造月  
Manufacturing Month

A:1 B:2 C:3 D:4 E:5 F:6  
G:7 H:8 I:9 J:10 K:11 L:12

1月: JANUARY 7月: JULY  
2月: FEBRUARY 8月: AUGUST  
3月: MARCH 9月: SEPTEMBER  
4月: APRIL 10月: OCTOBER  
5月: MAY 11月: NOVEMBER  
6月: JUNE 12月: DECEMBER

3. 製造日番号 (下記の記入値参照)  
Manufacturing Day No. (see below)

Manufacturing Day	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Charactor	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F	G

9. 製造年 (4桁のアラビア数字)  
Manufacturing Year (4digit Arabian No.)

Manufacturing Day	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
Charactor	H	J	K	L	M	N	P	Q	R	S	T	U	V	W	X


4. 工場記号 (アルファベット)  
Factory Sign (alphabet)  
A:シマツテック (Shimazutec)  
V:熊本工場 (Kumamoto)  
H:IMI  
W:PSNP (Santa Rosa)

5. サフィックス記号 (アルファベット)  
Suffix No. (alphabet)  
A~Z

6. 製造番号 (6桁)  
Manufacturing No. (6-digit)  
001001から始め、連番  
Start 001001

7. 客先記号  
Customer Sign

### 3-3 POSラベル印刷内容 Content of POS Label

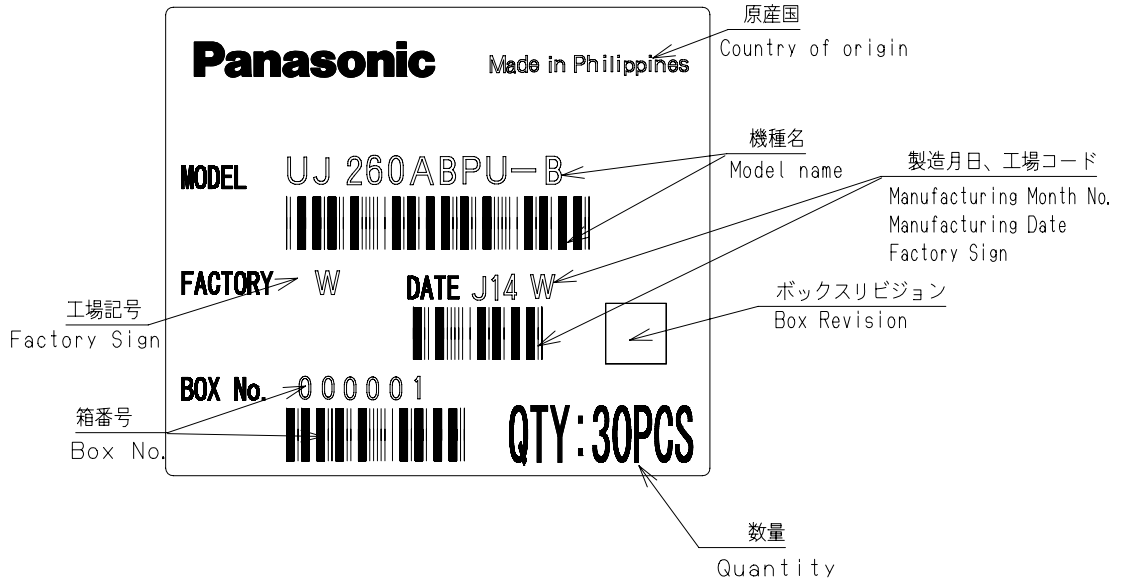

製造月日、工場コード  
Manufacturing Month No.  
Manufacturing Date  
Factory Sign

(例)    J   1 4   W  
(EX)    1   2   3

1. 製造月番号 (アルファベット)  
Manufacturing Month No. (Alphabet)

A:1 B:2 C:3 D:4 E:5 F:6  
G:7 H:8 I:9 J:10 K:11 L:12

2. 製造日  
Manufacturing Date.

3. 工場記号 (アルファベット)  
Factory Sign (alphabet)




V: 熊本工場 (Kumamoto)  
H: IMI  
W: PSNP (Santa Rosa)

### 4-1 押圧分布図


(Loading Specification to the Top Cover)

Maximum concentrated loads the drive can withstand.

AL (t=0.5)

-   $W_a \leq 2$  [N]
-   $W_a \leq 1$  [N]
-   $W_a = 0$  [N]  
(No Load)

$W_a$ : allowable concentrated load

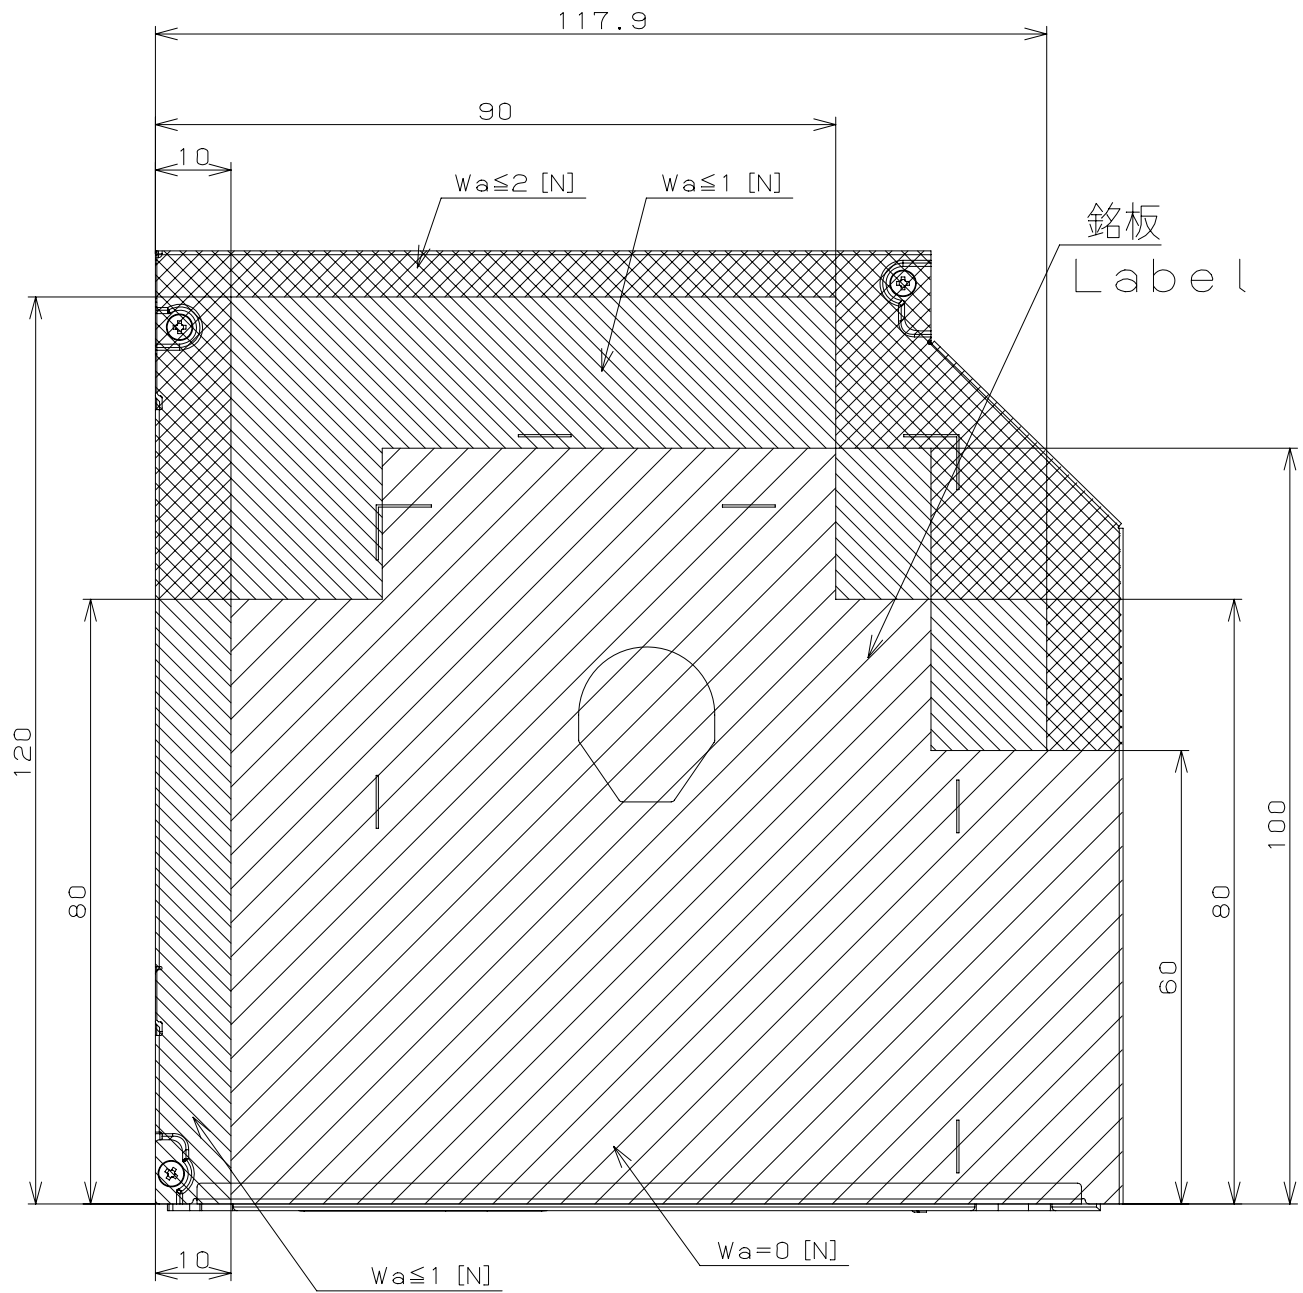







note: Don't apply load on label.

### 4-2 押圧分布図

(Loading Specification to the Bottom Cover)

Maximum concentrated loads the drive can withstand.

AL (t=0.6)

	$W_a \leq 3.0$ [N]		$W_a \leq 1.0$ [N]
	$W_a \leq 2.0$ [N]		$W_a \leq 0.5$ [N]
	$W_a \leq 1.5$ [N]		$W_a = 0$ [N] (No Load)

$W_a$ : allowable concentrated load

